




SELLO MECÁNICO EZG

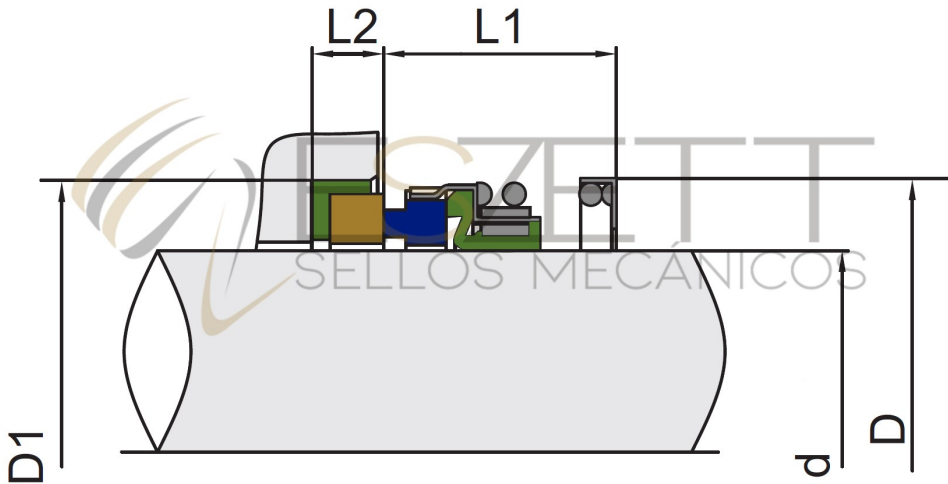

MODELO	d	*D	D1	L1	L2
EZG-0500	12.70	22.80	25.40	20.80	7.90
EZG-0625	15.80	26.70	31.75	22.50	10.30
EZG-0750	19.10	30.40	34.93	22.50	10.30
EZG-0875	22.20	33.40	38.10	24.00	10.30
EZG-1000	25.40	39.30	41.28	25.50	11.10
EZG-1125	28.60	42.00	44.45	27.00	11.10
EZG-1250	31.70	45.80	47.63	27.00	11.10
EZG-1375	34.90	49.30	50.80	29.00	11.10
EZG-1500	38.10	52.80	53.93	29.00	11.10
EZG-1625	41.20	55.50	63.33	35.00	12.70
EZG-1750	44.40	61.00	63.50	35.00	12.70
EZG-1875	47.60	64.00	66.68	38.30	12.70
EZG-2000	50.80	66.00	69.85	38.30	12.70
EZG-2125	53.90	71.50	76.20	43.00	14.20
EZG-2250	57.10	79.60	79.38	43.00	14.20
EZG-2375	60.30	79.60	82.55	46.20	14.20
EZG-2500	63.50	81.50	85.73	46.20	14.20
EZG-2625	66.60	84.60	85.73	49.50	15.90
EZG-2750	69.80	90.00	88.90	49.50	15.90
EZG-3000	76.20	96.80	98.43	52.50	15.90

Condiciones de operación:

Presión: ≤ 10 bares

Temperatura: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$

Velocidad: ≤ 12 m/s

Materiales:

Cara rotativa: Carbón,

Carburo de silicio,

Carburo de tungsteno

Asiento estacionario: Carbón,

Carburo de silicio,

Carburo de tungsteno

Empaques: Viton

Partes metálicas:

Acero inoxidable SS304